


# FORCED AIR HEATERS

## 209 Space Heater

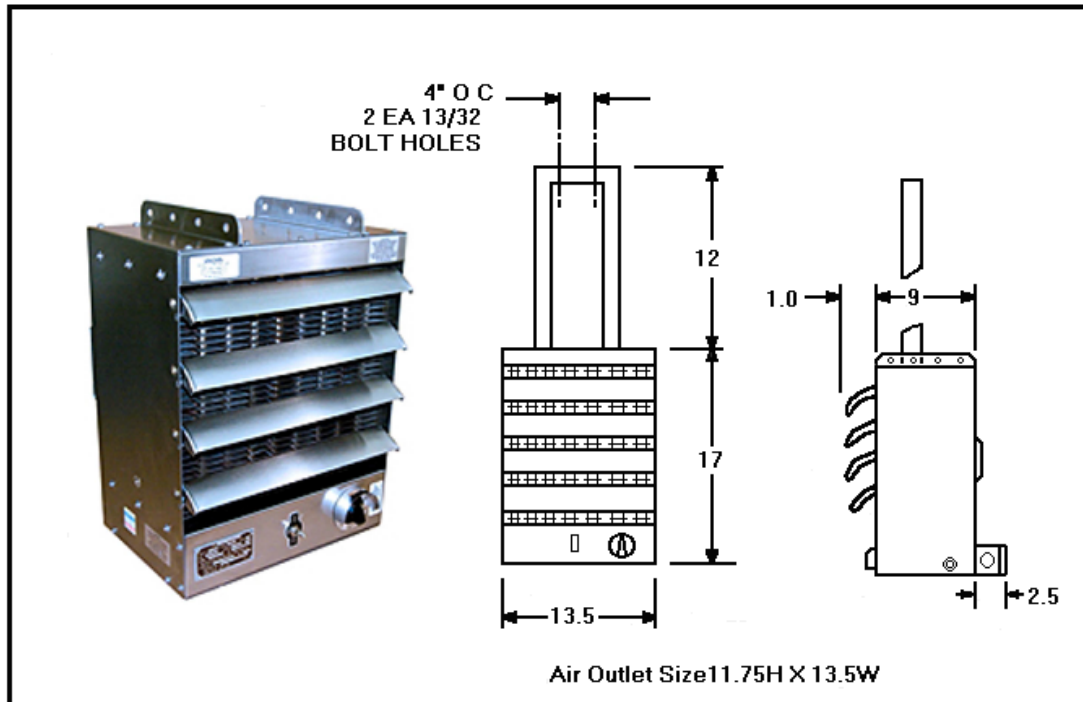

### HOW TO ORDER:

**209 4 7.5 - 3 - NM**

Basic Model  
Voltage 440  
Wattage 7.5KW  
Phase (3)  
Stainless Steel (NM)

### HEATER

#### INCLUDES:

- Operating thermostat (40-100 DEG F)
- Auto and Manual Hi-limit Thermostat
- Fused Transformer (when required)
- Contactor
- 12 in. Ceiling/Bulkhead Bracket
- Terminal Box
- Fan, motor, and louvers
- Fan/Off/Heat Switch
- \*\*\*Remote Thermostat Optional (24VAC)
- \*\*\*Power Disconnect Switch Optional

**Note:** When ordering, specify exact measurements needed from the ranges indicated below.

**Heater Range:** Voltage 208-600 VAC  
Wattage 1.0-7.5 KW  
Phase 1 or 3  
Cycle 60Hz  
Weight 45-55 lbs.

#### Construction:

- 16 GA stainless steel
- 6 or 9 individual heating elements
- SST heating elements
- Fins furnace brazed to sheath
- Heating elements hermetically sealed
- \*\*\*Sway Bar Optional
- \*\*\*Heater listed to UL-2021 (ETL)

- Unit is shock tested to MIL-S-901C.
- Unit is vibration tested to MIL-STD-167.

Unit is manufactured I/A/W USCG, IEEE 45 and ETL/ANSI/UL-2021 specifications.



[www.ValadElectric.com](http://www.ValadElectric.com)

Phone: (888)509-4927

Email: [info@valadelectric.com](mailto:info@valadelectric.com)