


FORCED AIR HEATERS


BH (AC)

(I/A/W mil-H-22663 ships)

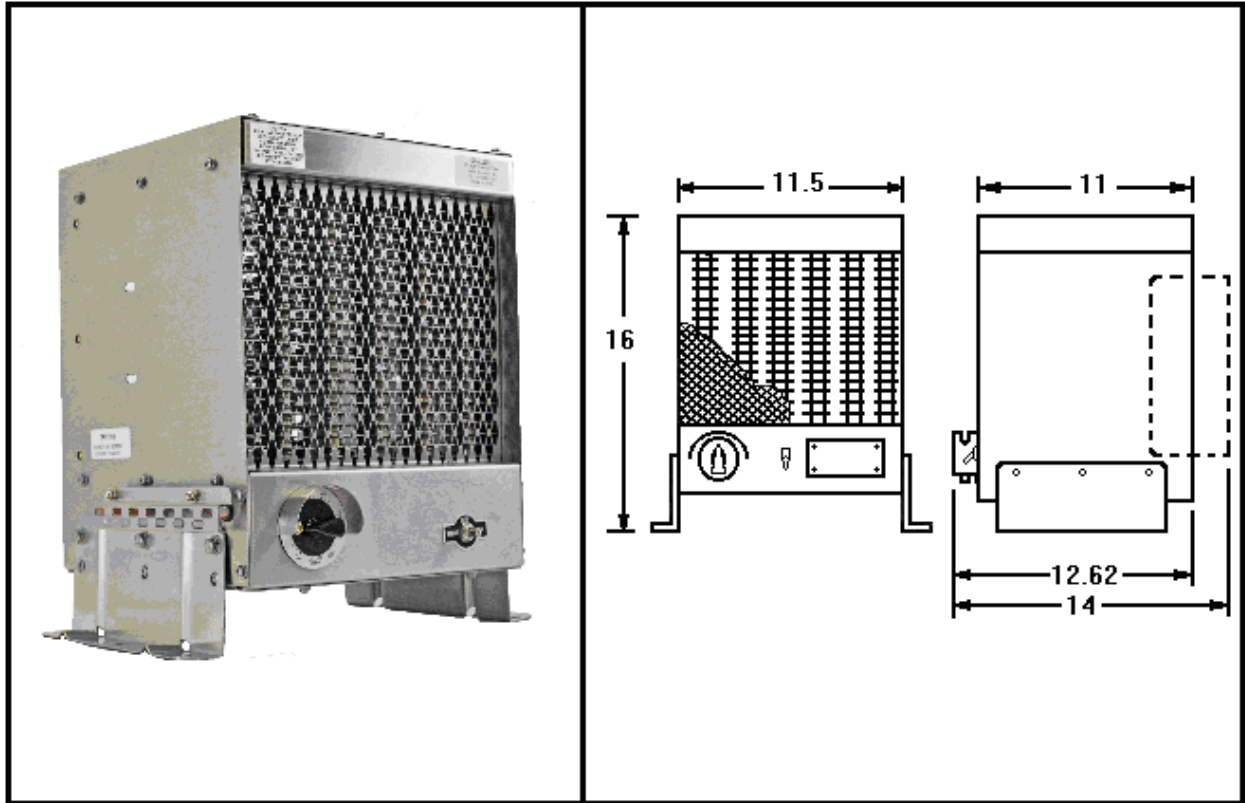

HOW TO ORDER:

BH 4 4.0 - 3 - NM

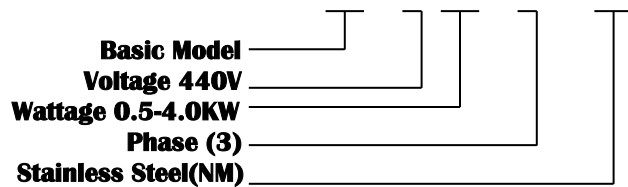

HEATER INCLUDES:

- Operating Thermostat
- Manual and Auto Safety Overload
- Contactor
- Stepdown transformer (when required)
- Terminal Box
- Mounting Brackets
- Cord and Plug (optional)
- Safety Screen
- Fan/Off/Heat Switch

Note: When ordering, specify exact measurements needed from the ranges indicated below.

Heater Range: Voltage 110-480 VAC
Wattage 0.5-4.0 KW
Phase 1 or 3
Cycle 60
Weight 35 lbs.

Construction:

- 16 GA 304 Stainless Steel
- 3 or 6 Individual Heating Elements
- Hermetically Sealed Heating Elements

Unit is manufactured to USCG, IEEE 45 and UL guidelines.

Unit is shock tested to MIL-S-901C.
Unit is vibration tested to MIL-STD-167.
Unit is noise tested to MIL-STD-740.



www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com