


CONVECTION HEATER

DFM Fixed Bulkhead Mounted

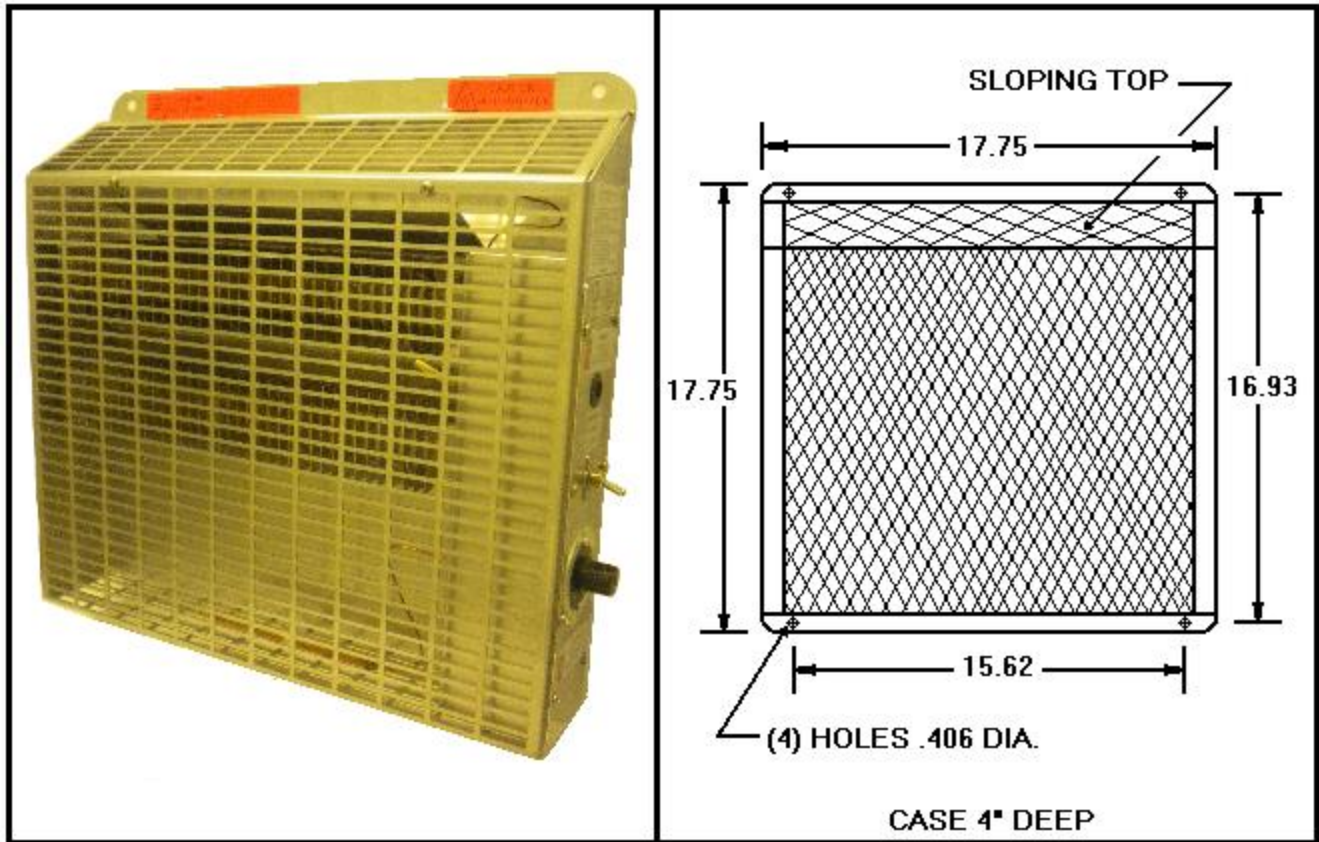

HOW TO ORDER:

	DFM	1	1.0	-1	NM
Basic Model	└──┘	└──┘	└──┘	└──┘	└──┘
Voltage 120VAC	└──┘	└──┘	└──┘	└──┘	└──┘
Wattage:1.0KW	└──┘	└──┘	└──┘	└──┘	└──┘
Phase (1)	└──┘	└──┘	└──┘	└──┘	└──┘
Stainless Steel (NM)	└──┘	└──┘	└──┘	└──┘	└──┘

HEATER INCLUDES:

- On/off Switch
- Operating Thermostat
- Manual & Auto Thermal Cut-Out
- Terminal Block for power hook-up

Construction:

- 18GA 304 Stainless Steel
- Heating Element 304 Stainless Steel
- Fins furnace brazed to sheath
- Element Hermetically Sealed
- Cable entrance/rear or bottom
- Heater Listed to UL-2021 (ETL)

Note: When ordering, specify exact measurements needed from ranges indicated below.

Heater Range:

- Voltage 110-240 VAC
- Wattage 0.1-1.5 KW
- Phase 1
- Cycle 60Hz
- Weight 15 lbs

Unit is manufactured to I/A/W USCG, IEEE 45, ETL/ANSI/UL-2021 and military specifications.

Note: Automatic thermal cut out set to 250° F available on DFM, DFMH, DFML and DFMLH only.



www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com