



CONVECTION HEATER

DFMH Fixed Bulkhead Mounted

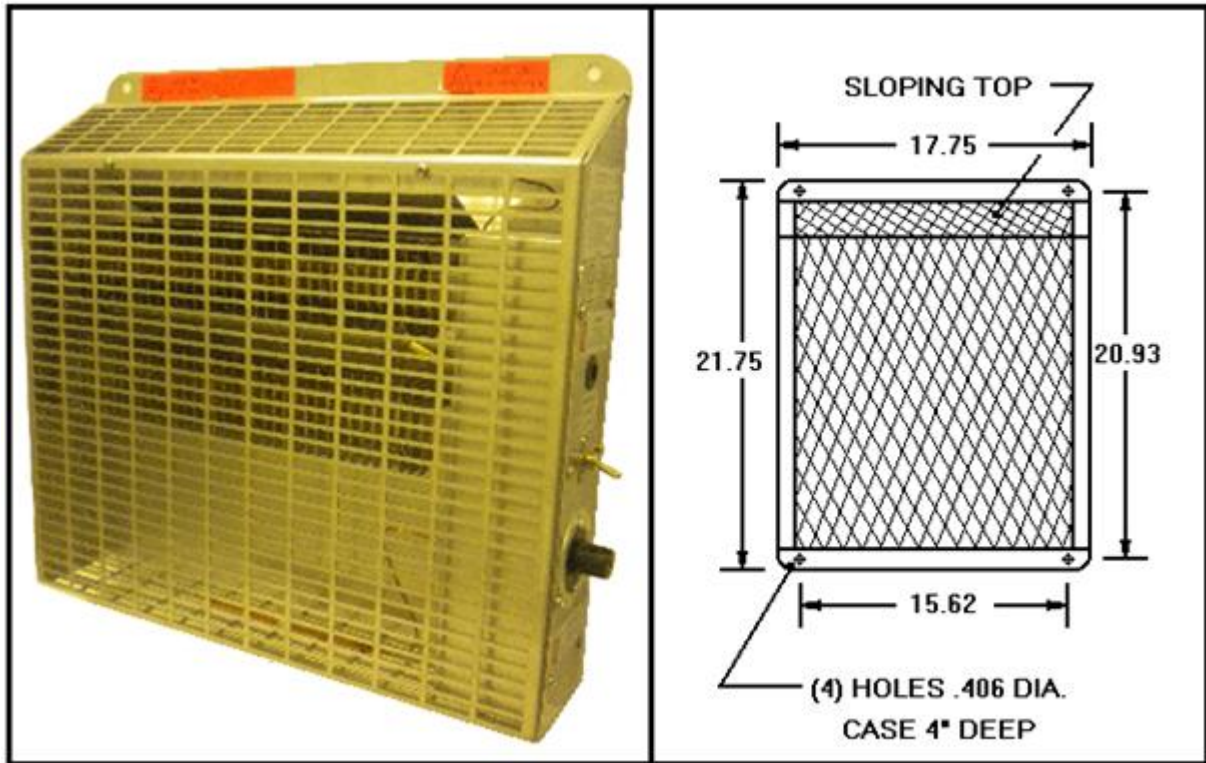

HOW TO ORDER: DFMH 41 . 5 - 3 - NMCB

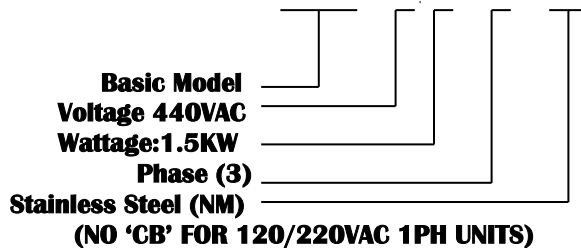

- HEATER INCLUDES:**
- On/off Switch
 - Operating Thermostat
 - Manual & Auto Thermal Cut-Out
 - Terminal Block for power hook-up

- Construction:**
- 18GA 304 Stainless steel
 - Heating Element 304 Stainless Steel
 - Fins furnace brazed to sheath
 - Elements Hermetically Sealed
 - Cable entrance/rear or bottom
 - Heater Listed to UL-2021 (ETL)

Note: When ordering, specify exact measurements needed from ranges indicated below.

Heater Range: Voltage 110-480 VAC
 Wattage 0.5-2.0 KW
 Phase 1 and 3
 Cycle 60Hz
 Weight 20 lbs

Unit is manufactured to I/A/W USCG, IEEE 45, ANSI/UL-2021 and military specifications.

Note: 440 VAC units require an additional control box on right side of heater – add approximately 5” to width. An Auto Hi-Limit set to 250° F is standard on all 440V models.



www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com