


CONVECTION HEATER


DFML Fixed Bulkhead Mounted

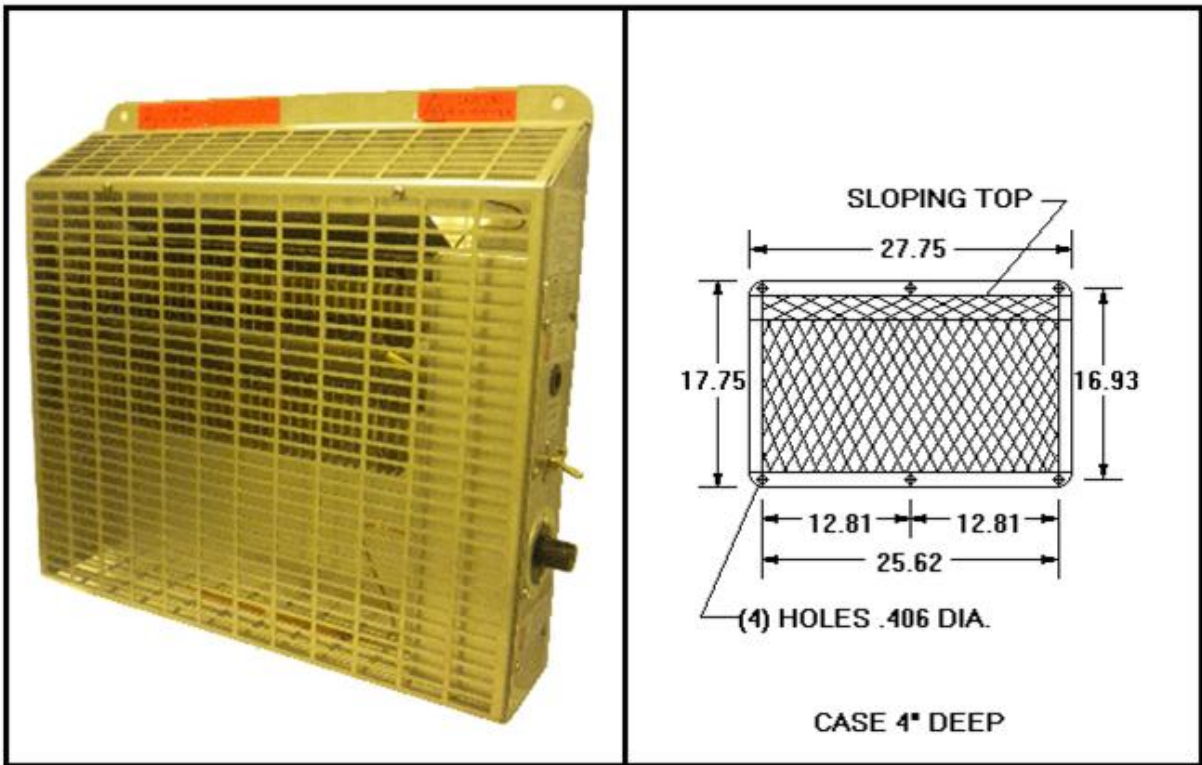

HOW TO ORDER:

DFML 2 2.0 -1 NM

Basic Model
Voltage 220VAC
Wattage: 2.0KW
Phase (1)
Stainless Steel (NM)

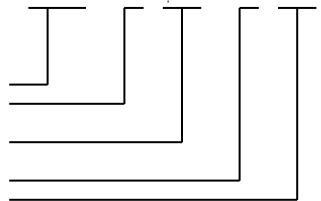

HEATER INCLUDES: -On/off Switch
-Operating Thermostat
-Manual & Auto Thermal Cut-Out
-Terminal Block for power hook-up

Construction: -18GA 304 Stainless Steel
-Heating Element 304 Stainless Steel
-Fins furnace brazed to sheath
-Element Hermetically Sealed
-Cable entrance/rear or bottom
-Heater Listed to UL-2021 (ETL)

Note: When ordering, specify exact measurements needed from ranges indicated below.

Heater Range: Voltage 110-240 VAC
Wattage 1.0-2.0 KW
Phase 1
Cycle 60Hz
Weight 20 lbs

Unit is manufactured to I/A/W USCG, IEEE 45, ETL/ANSI/UL-2021 and military specifications.

Note: Automatic thermal cut out set to 250° F available on DFM, DFMH, DFML and DFMLH only.



www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com