



# CONVECTION HEATER

## DFMLH Fixed Bulkhead Mounted

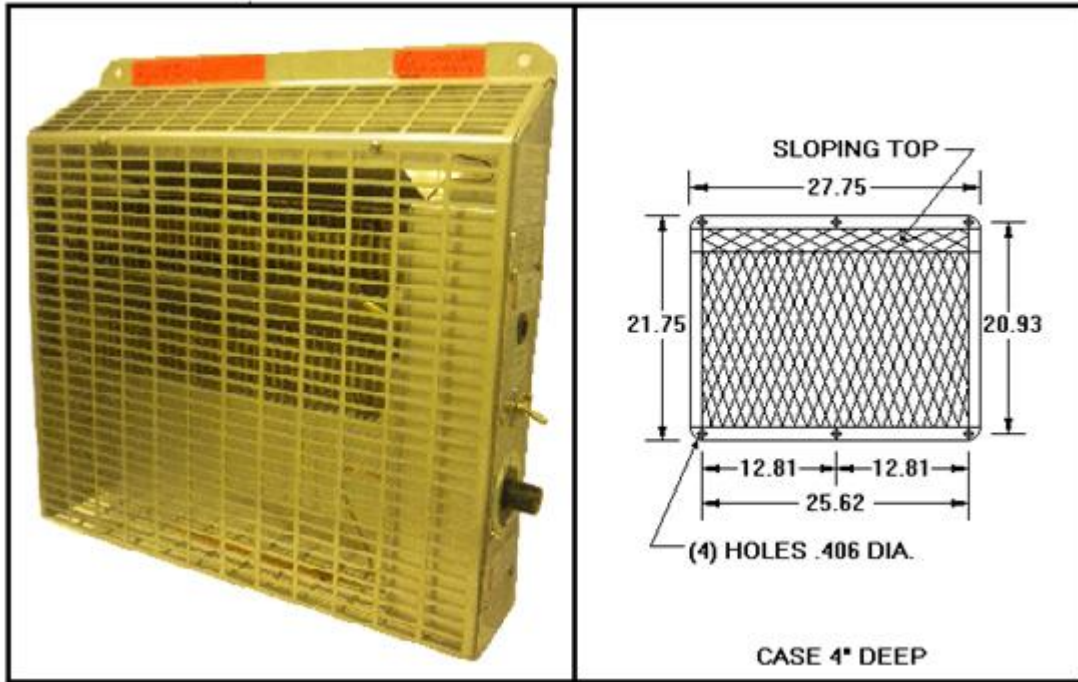

**HOW TO ORDER: DFMLH 41 . 5 - 3 - NMCB**

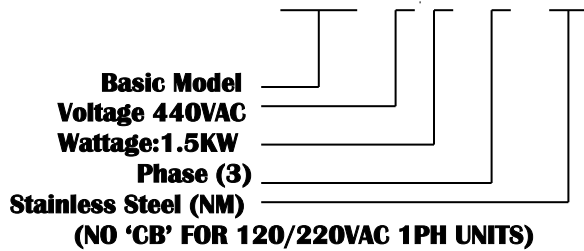

- HEATER INCLUDES:**
- On/off Switch
  - Operating Thermostat
  - Manual & Auto Thermal Cut-Out
  - Terminal Block for power hook-up

- Construction:**
- 18GA 304 Stainless steel
  - Heating Element 304 Stainless Steel
  - Fins furnace brazed to sheath
  - Elements Hermetically Sealed
  - Cable entrance/rear or bottom
  - Heater Listed to UL-2021 (ETL)

**Note:** When ordering, specify exact measurements needed from ranges indicated below.

- Heater Range:**
- Voltage 110-480 VAC
  - Wattage 1.5-3.0 KW
  - Phase 1 and 3
  - Cycle 60Hz
  - Weight 30 lbs

Unit is manufactured to I/A/W USCG, IEEE 45, ANSI/UL-2021 and military specifications.

**Note:** 440 VAC units require an additional control box on right side of heater – add approximately 5” to width. An Auto Hi-Limit set to 250° F is standard on all 440V models.



[www.ValadElectric.com](http://www.ValadElectric.com)

Phone: (888)509-4927

Email: [info@valadelectric.com](mailto:info@valadelectric.com)