



CONVECTION HEATER

DFMM Fixed Bulkhead Mounted

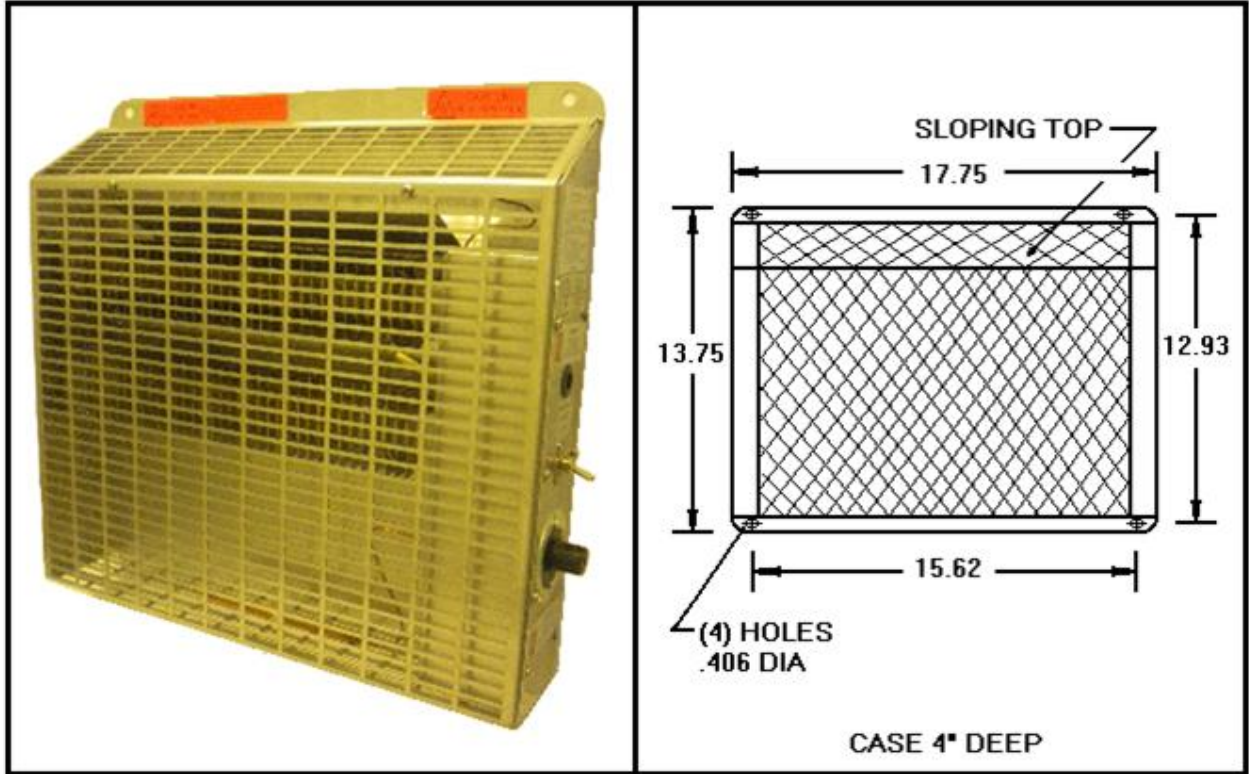

HOW TO ORDER: DFMM 1 0.75 -1 NM

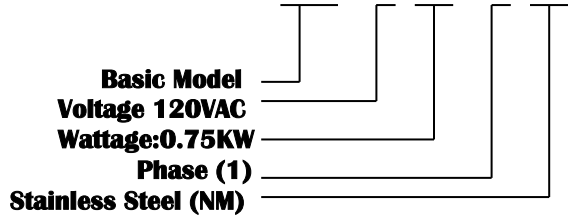

- HEATER INCLUDES:**
- On/off Switch
 - Operating Thermostat
 - Manual Thermal Cut-Out
 - Terminal Block for power hook-up

- Construction:**
- 18GA 304 Stainless Steel
 - Heating Element 304 Stainless Steel
 - Fins furnace brazed to sheath
 - Element Hermetically Sealed
 - Cable entrance/rear or bottom
 - Heater Listed to UL-2021 (ETL)

Note: When ordering, specify exact measurements needed from ranges indicated below.

Heater Range: Voltage 110-240 VAC
 Wattage 0.1-0.75 KW
 Phase 1
 Cycle 60Hz
 Weight 12 lbs

Unit is manufactured to I/A/W USCG, IEEE 45, ETL/ANSI/UL-2021 and military specifications.

Note: Automatic thermal cut out set to 250° F available on DFM, DFMH, DFML and DFMLH only.



www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com