


CONVECTION HEATER

DFMMS Fixed Bulkhead Mounted

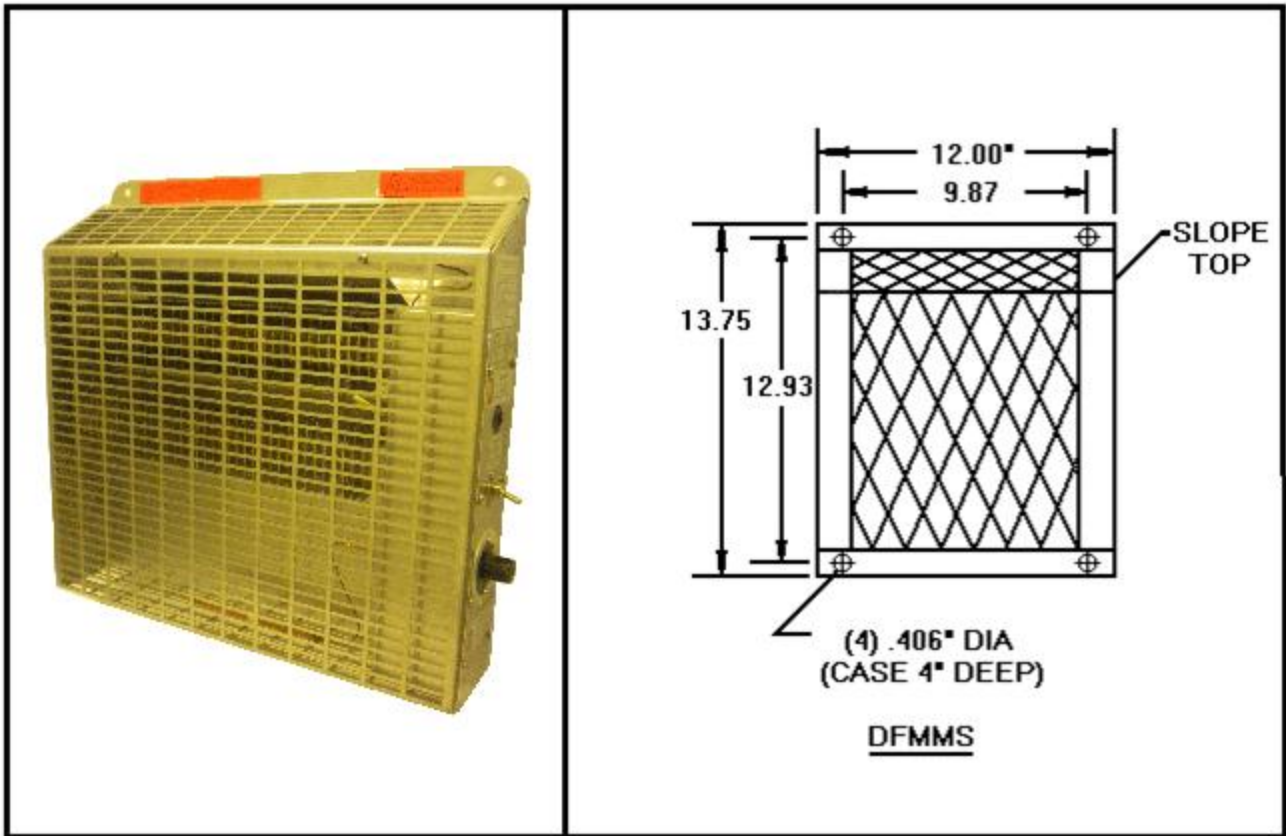

HOW TO ORDER: **DFMMS 1 0.5 - 1 NM**

Basic Model
Voltage 115VAC
Wattage: 0.5KW
Phase (1)
Stainless Steel (NM)

HEATER INCLUDES:

- On/off Switch
- Operating Thermostat
- Manual thermal cut-out
- Terminal Block for power hook-up

Construction:

- 18GA Stainless steel
- Heating Element-stainless steel
- Fins furnace brazed to sheath
- Element hermetically sealed
- Cable entrance/rear or bottom
- ***Heater listed to UL-2021 (ETL)

Note: When ordering, specify exact measurements needed from ranges indicated below.

Heater Range:

- Voltage 110-220 VAC
- Wattage 0.1-0.5 KW
- Phase 1
- Cycle 60 Hz
- Weight 7.5 lbs

Unit is manufactured to I/A/W USCG, IEEE 45, ANSI/UL-2021 and military specifications.

Note: Automatic and manual thermal cut out set to 250° F available on DFM, DFMH, DFML and DFMLH only.



www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com