


FORCED AIR HEATERS

CAB HEATER C475 (AC)

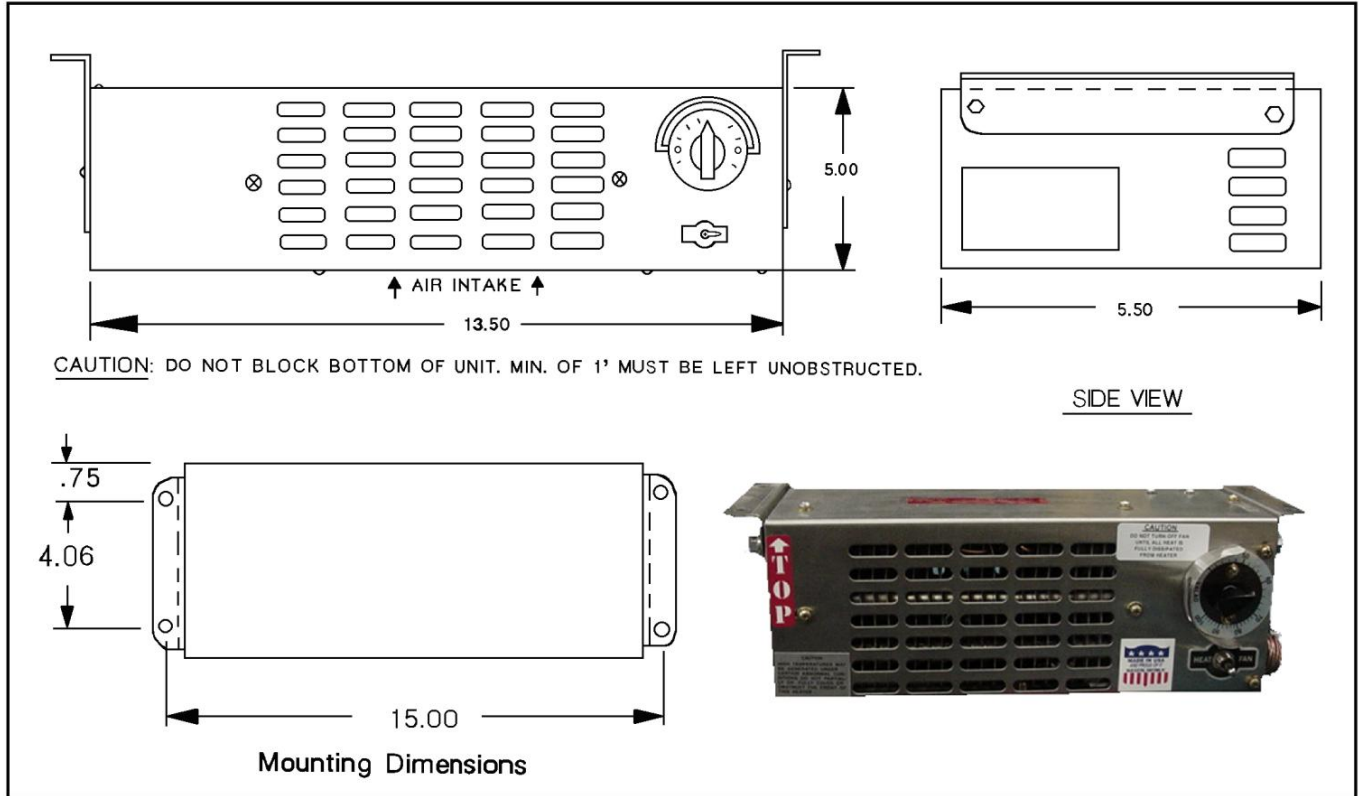

CAUTION: DO NOT BLOCK BOTTOM OF UNIT. MIN. OF 1' MUST BE LEFT UNOBSTRUCTED.

SIDE VIEW

Mounting Dimensions

HOW TO ORDER: C475 - 1 1.5 - 1 NM

Basic Model
Voltage 120VAC
Wattage 1.5KW
Phase (1)
Non-Magnetic
Stainless Steel (NM)

HEATER INCLUDES:

- Fan/Off/Heat Switch
- Manual & Auto Hi-limit
- Operating Thermostat
- Power Terminal Block
- Mounting Bracket

Note: When ordering, specify exact parameters from below.

Heater Range: Voltage 120 VAC
Wattage 0.1-1.5 KW
Weight 20lbs
*Also available in 220V, 1PH

Construction:

- 18 GA 304 Stainless Steel Cabinet
- Individual Stainless Steel Heating Elements with Fins Furnace Brazed.
- Heating Elements Hermetically Sealed.

Unit is manufactured to IEEE 45 and ETL/UL guidelines.

Heater can be used in Fan position for air only.
Made in USA




www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com

FORCED AIR HEATERS

CAB HEATER C475 (DC)

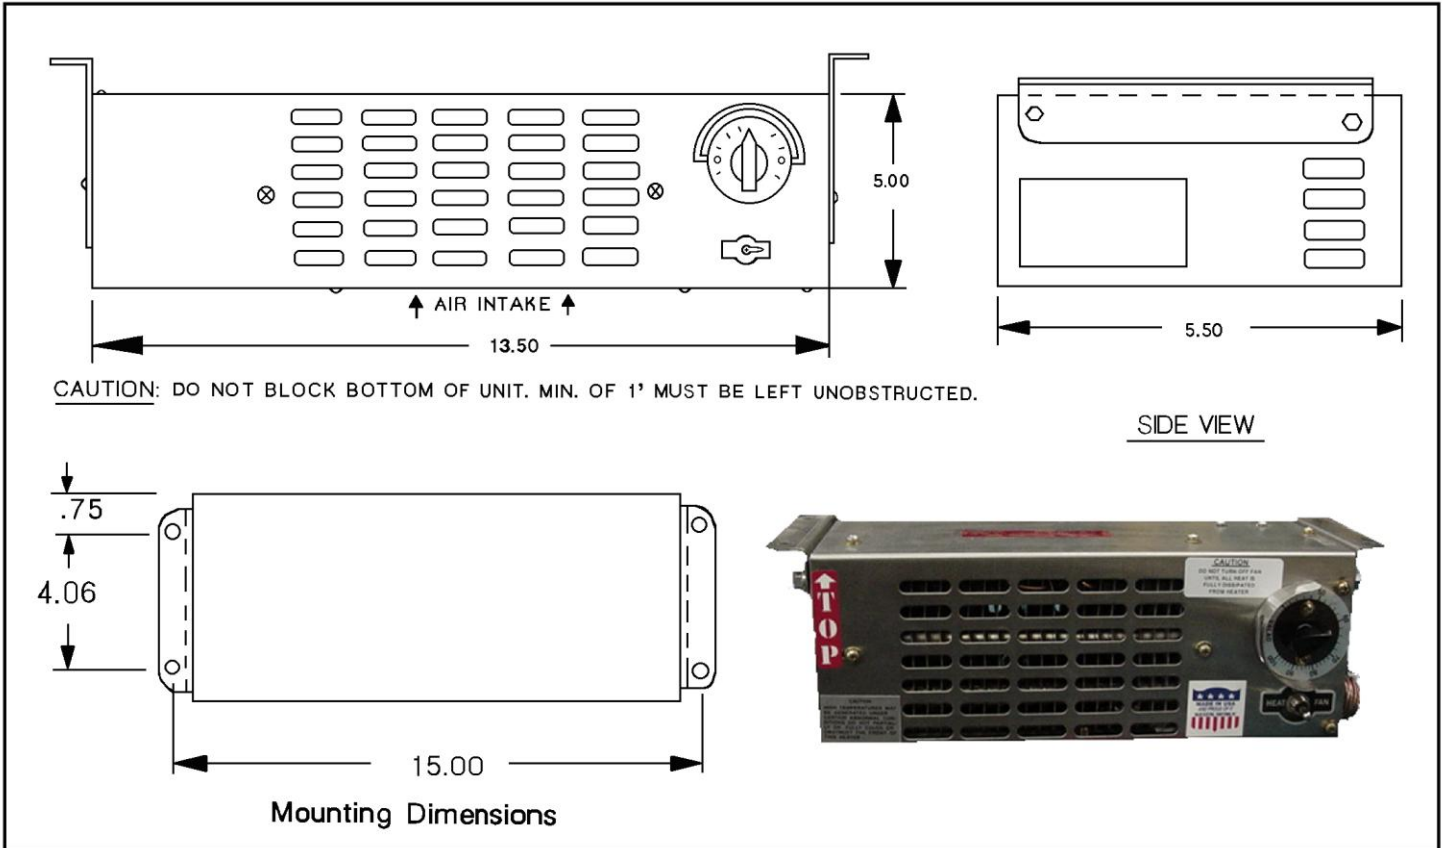

CAUTION: DO NOT BLOCK BOTTOM OF UNIT. MIN. OF 1' MUST BE LEFT UNOBSTRUCTED.

SIDE VIEW

Mounting Dimensions

HOW TO ORDER: C475 - 72 - 1.0 DC - NM

Basic Model
Voltage 72
Wattage 1.5KW
DC Current
Non-Magnetic
Stainless Steel (NM)

- HEATER INCLUDES:**
- Fan/Off/Heat Switch
 - Auto Hi-limit
 - Operating Thermostat
 - Contactor
 - Power Terminal Block
 - Mounting Bracket

Note: When ordering, specify exact parameters from below.

Heater Range: Voltage 12 - 72 VDC
Wattage 0.1 - 1.5 KW
Weight 20lbs

Construction: -18 GA 304 Stainless Steel Cabinet
-Individual Stainless Steel Heating Elements with Fins
Furnace Brazed.

Unit is manufactured to IEEE 45 and ETL/UL guidelines.

Heater can be used in Fan position for air only.
Made in USA



www.ValadElectric.com

Phone: (888)509-4927

Email: info@valadelectric.com